

Automotive / LTV

# DURACELL®

— ⊕ TRUSTED EVERYWHERE ⊖ —

Longer Life in Heat • More Reliable in Cold



Even in cooler climates, high under-the-hood temperatures can be a major cause of battery failure. Now you can confidently start your vehicle in warm or cold conditions with Duracell batteries. These automotive batteries safeguard against high temperatures. They also integrate special design features to extend battery life and performance. And true to Duracell dependability, these batteries deliver maximum power for reliable starts with every turn of the key.



## All Weather Starting Protection



- Dependable cranking power ensures engine starts in cold weather



- Reinforced internal components resists the corrosion acceleration of higher temperature conditions




# Duracell EHP Automotive/LTV Batteries

GROUP NO.	PART NO.	PERFORMANCE LEVEL			FREE REPLACEMENT WARRANTY	APPROX. WEIGHT (lbs.)	MAXIMUM OVERALL DIMENSIONS						FOOTNOTES
		CCA @ 0°F	RES. CAP.	20 AH RATE			Length		Width		Height		
							inch	mm	inch	mm	inch	mm	
<b>12-VOLT DURACELL® EHP — EXTRA HIGH PERFORMANCE</b>													
24F	EHP24F	725	120	62	30 MONTHS	42.5	10 3/4	273	6 3/4	171	9	229	3,17,22,45
34	EHP34	850	115	59	30 MONTHS	38.5	10 3/4	273	6 7/8	175	8	203	3,17,18,22,37,45
35	EHP35	625	95	44	30 MONTHS	35.5	9 3/4	248	6 7/8	175	8 7/8	225	3,17,22,45
48	EHP48	730	120	72	30 MONTHS	42.5	11	278	6 7/8	175	7 1/2	190	17,22,26,45
5	EHP65	750	140	68	30 MONTHS	45.5	12	305	7 3/8	187	7 5/8	194	3,17,22,45
75	EHP75	690	90	52	30 MONTHS	34.5	9 3/4	248	7	178	7 1/4	184	3,17,22,45
78	EHP78	850	115	59	30 MONTHS	39	10 3/4	273	6 7/8	175	7 1/4	184	3,17,22,45

**FOOTNOTES:**

- All batteries have SAE automotive posts unless noted
- 3. Copper cover / black case
- 17. Includes handle
- 18. Includes top adapter
- 22. Flush manifold vented cover
- 26. Venting elbow supplied
- 37. For height with adapter add 7/8" (22cm)
- 45. If battery is used in on-highway vehicles equipped with two-way radios (such as taxis, police, and emergency vehicles), marine applications, off-highway use, and other non-automotive usage, free warranty replacement period will be 6 months

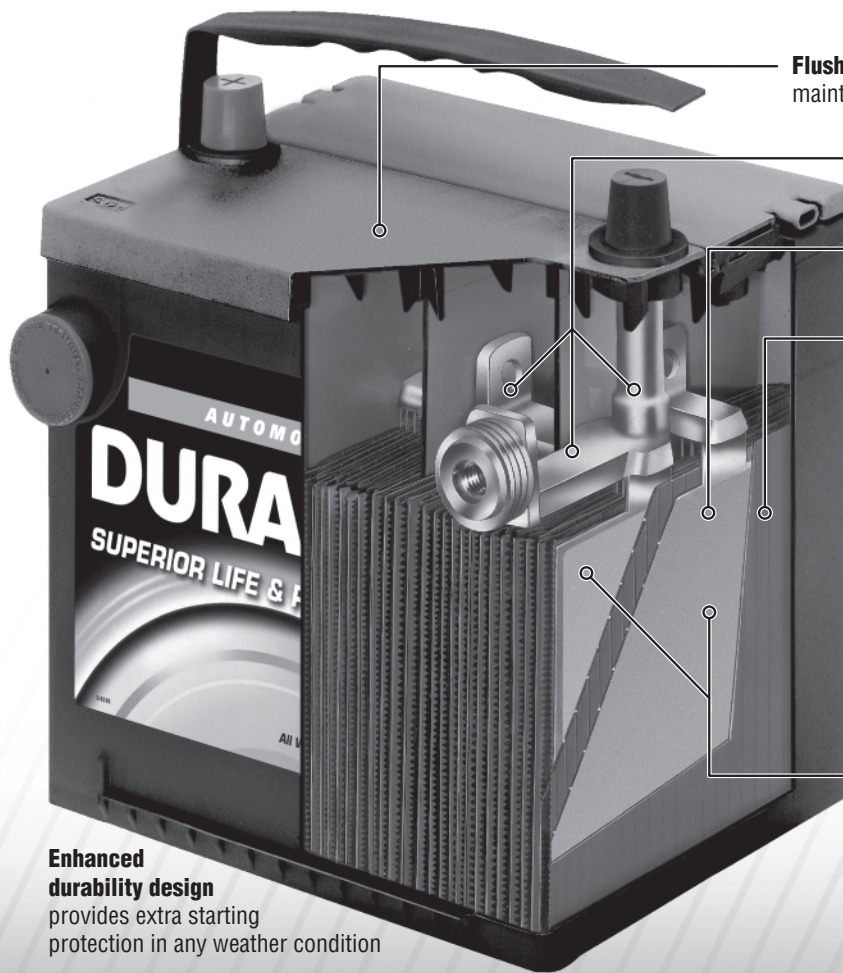


**Flush cover** design enhances overall battery performance, maintenance, safety, and convenience

**Fortified posts, straps, & welds** resist vibration damage, maximize current transfer

**Enhanced crystallization** of plates provides more power-per-pound

**Short-protector separators** have thicker backweb material that prevents plate-to-plate shorts

**Ultra-pure demineralized electrolyte** precision filled to exacting levels for extended life



**Optimized Power Plates (Heavy-duty)**

- Full-frame positive and negative plates prevent life robbing electrical shorts from exposed wire
- Maximize power and energy storage capacity

**Enhanced durability design** provides extra starting protection in any weather condition

**EAST PENN manufacturing co., inc.**

Lyon Station, PA 19536-0147 • Phone: 610-682-6361 • Fax: 610-682-4781  
www.DriveDURACELL.com

E.P.M. Form No. 1856 Rev. 10/12 © 2012 by EPM Printed in U.S.A.

**DURACELL®**

— **TRUS±ED EVERYWHERE®** —

©2012 Duracell. Duracell is a registered trademark of the Gillette Company, used under license. All rights reserved.