



Effective August 1, 2017

Supersedes all previous information. Subject to change without notice




LYON STATION, PA Phone: 610-682-6361 Fax: 610-682-4781

www.driveduracell.com

GROUP NO.	PART NO.	PERFORMANCE LEVEL				WEIGHT (lb)	MAXIMUM OVERALL DIMENSIONS						Core Value	Warranty Free Months	FOOTNOTES
		CCA	R.C.	REF. CA	20 HR CAP		LENGTH		WIDTH		HEIGHT				
							in	mm	in	mm	in	mm			
12-VOLT AUTO/LTV — AGM VALVE REGULATED — 36 MONTH FREE REPLACEMENT — 36 MONTH ROADSIDE ASSISTANCE															
34	AGM34	775	120	890	55	42.5	10-3/4	273	6-7/8	175	8	203	1.0	36	1,13,17,37,38,39,46,78
34R	AGM34R	775	120	890	55	42.5	10-3/4	273	6-7/8	175	8	203	1.0	36	1,13,17,37,38,39,46,78
35/85	AGM35/85	640	100	755	50	40	9-9/16	242	6-3/4	171	7-3/4	197	1.0	36	1,13,17,18,37,38,39,46
47 (H5/L2)	AGM47	600	100	690	60	39	9-9/16	242	6-7/8	175	7-1/2	190	1.0	36	13,17,22,38,39,46
48 (H6/L3)	AGM48	760	120	875	70	46.5	11	278	6-7/8	175	7-1/2	190	1.0	36	13,17,22,38,39,46
49 (H8/L5)	AGM49	850	170	975	92	58	13-15/16	354	6-7/8	175	7-1/2	190	1.0	36	13,17,22,38,39,46
65	AGM65	750	150	860	75	47.5	12	305	7-3/8	187	7-5/8	194	1.0	36	1,13,17,38,39,46
78	AGM78	775	120	890	55	43	10-3/4	273	6-7/8	175	7-1/4	184	1.0	36	1,13,17,38,39,46
94R (H7/L4)	AGM94R	800	140	920	80	52	12-7/16	315	6-7/8	175	7-1/2	190	1.0	36	13,17,22,38,39,46
95R (H9/L6)	AGM95R	950	190	1050	105	64.5	15-1/2	394	6-7/8	175	7-1/2	190	1.0	36	13,17,22,24,38,39,46
75/86	AGM75DT	640	100	755	50	41	9-9/16	242	7-1/16	179	7-15/16	202	1.0	36	1,13,16,17,18,22,37,38,39,46
34/78	AGM78DT	775	120	890	55	43	10-3/4	273	6-7/8	175	8	203	1.0	36	1,13,16,17,38,39,46
12-VOLT AUTO/LTV — AGM VALVE REGULATED — 24 MONTH FREE REPLACEMENT															
46A24L (MIATA)	AGMU1P	320	45	400	—	24	7-3/4	197	5-1/8	130	7-1/8	181	0.5	24	2,13,38,39,45
S46B24R (PRIUS)	AGM51P	325	60	390	46	29.5	9-1/4	235	5	127	8-5/8	220	1.0	24	13,22,38,39,46,J
GROUP NO.	PART NO.	PERFORMANCE LEVEL				WEIGHT (lb)	MAXIMUM OVERALL DIMENSIONS						Core Value	Warranty Free Months	FOOTNOTES
		CCA	R.C.	REF. CA	20 HR CAP		LENGTH		WIDTH		HEIGHT				
							in	mm	in	mm	in	mm			
12-VOLT AUTO/LTV — EHP TECHNOLOGY — 30 MONTH FREE REPLACEMENT — 36 MONTH ROADSIDE ASSISTANCE															
24F	EHP24F	725	120	890	42.5	10-3/4	273	6-3/4	171	9	229	1.0	30	3,17,22,45	
34	EHP34	800	115	985	41	10-3/4	273	6-7/8	175	8	203	1.0	30	3,17,18,22,37,45	
35	EHP35	640	95	785	37	9-9/16	247	6-7/8	175	8-7/8	225	1.0	30	3,17,22,45	
48 (H6/L3)	EHP48	730	120	900	43	11	278	6-7/8	175	7-1/2	190	1.0	30	17,22,26,45	
65	EHP65	750	140	925	44	12	305	7-3/8	187	7-5/8	194	1.0	30	3,17,22,45	
75	EHP75	690	95	850	36	9-3/4	248	7	178	7-1/4	184	1.0	30	3,17,22,45	
78	EHP78	800	115	985	41	10-3/4	273	6-7/8	175	7-1/4	184	1.0	30	3,17,22,45	
12-VOLT AUTO/LTV — HP TECHNOLOGY — 24 MONTH FREE REPLACEMENT															
24	HP24	650	115	800	41	10-3/4	273	6-3/4	171	9	229	1.0	24	17,22,45	
24F	HP24F	650	115	800	41	10-3/4	273	6-3/4	171	9	229	1.0	24	17,22,45	
27	HP27	710	120	875	48.5	12	305	6-3/4	171	9	229	1.0	24	21,45	
27F	HP27F	710	120	875	48.5	12-3/8	314	6-3/4	171	9	229	1.0	24	21,45	
34	HP34	690	110	850	38	10-3/4	273	6-7/8	175	8	203	1.0	24	17,18,22,37,45	
34R	HP34R	690	110	850	38	10-3/4	273	6-7/8	175	8	203	1.0	24	17,18,22,37,45	
36R	HP36R	650	120	800	41.5	10-1/4	260	7-1/4	184	8	203	1.0	24	45	
40R (T6/LB3)	HP40R	650	105	800	38	11-00	278	6-7/8	175	6-7/8	175	1.0	24	17,22,26,45	
41	HP41	650	100	800	38	11-9/16	293	6-7/8	175	6-7/8	175	1.0	24	22,45	
47 (H5/L2)	HP47	650	100	800	37	9-9/16	242	6-7/8	175	7-1/2	190	1.0	24	17,22,26,45	
48 (H6/L3)	HP48	680	120	835	42.5	11	278	6-7/8	175	7-1/2	190	1.0	24	17,22,26,45	
49 (H8/L5)	HP49	900	185	1105	52.5	13-15/16	354	6-7/8	175	7-1/2	190	1.0	24	17,22,26,45	
51R	HP51R	500	75	615	30	9-3/8	238	5	127	8-3/4	222	1.0	24	22,45	
59	HP59	590	100	725	38	9-1/2	241	7-7/16	189	7-1/2	190	1.0	24	17,45	
65	HP65	850	150	1045	46.5	12	305	7-3/8	187	7-5/8	194	1.0	24	17,22,45	
75	HP75	650	90	800	34.5	9-3/4	248	7	178	7-1/4	184	1.0	24	17,22,45	
78	HP78	690	110	850	37.5	10-3/4	273	6-7/8	175	7-1/4	184	1.0	24	17,22,45	
79	HP79	840	140	1035	43	12-1/16	307	7-1/16	179	7-3/8	188	1.0	24	22,45	
85	HP85	650	110	800	35	9	229	6-7/8	175	8-1/8	206	1.0	24	22,45	
86	HP86	690	95	850	35.5	9	229	6-7/8	175	8-1/8	206	1.0	24	22,45	
90 (T5/LB2)	HP90	600	90	740	34	9-9/16	242	6-7/8	175	6-7/8	175	1.0	24	17,22,26,45	
91 (T6/LB3)	HP91	700	100	860	39	11	278	6-7/8	175	6-7/8	175	1.0	24	17,22,26,45	
93 (T8/LB5)	HP93	800	130	985	47.5	13-15/16	354	6-7/8	175	6-7/8	175	1.0	24	17,22,26,45	
94R (H7/L4)	HP94R	790	140	970	47	12-7/16	315	6-7/8	175	7-1/2	190	1.0	24	17,22,26,45	
95R (H9/L6)	HP95R	850	190	1045	61.5	15-1/2	394	6-7/8	175	7-1/2	190	1.0	24	17,22,26,45	
96R	HP96R	600	90	740	34	9-9/16	242	6-7/8	175	6-7/8	175	1.0	24	17,22,45	
101	HP101	650	110	800	36	10-1/4	260	7-1/16	179	6-11/16	170	1.0	24	22,45	
124	HP124	700	100	860	39.5	10-1/4	260	6-7/8	175	8-3/8	212	1.0	24	22,45	
124R	HP124R	700	100	860	39.5	10-1/4	260	6-7/8	175	8-3/8	212	1.0	24	22,45	
75/86	HP75DT	690	95	850	36.5	9-3/4	248	7	178	8-1/8	206	1.0	24	14,16,17,18,22,37,45	
34/78	HP78DT	800	115	985	42	10-3/4	273	6-7/8	175	8	203	1.0	24	14,16,17,18,22,37,45	
12-VOLT AUTO/LTV — 18 MONTH FREE REPLACEMENT															
24	D24	550	90	675	37	10-3/4	273	6-3/4	171	9	229	1.0	18	17,22,45	
24F	D24F	550	90	675	37	10-3/4	273	6-3/4	171	9	229	1.0	18	17,22,45	
25	D25	550	90	675	34	9-3/4	248	6-7/8	175	8-7/8	225	1.0	18	17,22,45	
26	D26	540	80	665	31	8-3/4	222	6-3/4	171	8	203	1.0	18	17,18,22,37,45	
26R	D26R	540	80	665	31	8-3/4	222	6-3/4	171	8	203	1.0	18	17,18,22,37,45	
34	D34	550	90	675	35	10-3/4	273	6-7/8	175	8	203	1.0	18	17,18,22,37,45	
35	D35	550	90	675	34	9-9/16	247	6-7/8	175	8-7/8	225	1.0	18	17,22,45	
42	D42	475	70	585	30	9-9/16	242	6-7/8	175	6-7/8	175	1.0	18	45	
51	D51	450	70	555	28.5	9-3/8	238	5	127	8-3/4	222	1.0	18	22,45	
51R	D51R	450	70	555	28.5	9-3/8	238	5	127	8-3/4	222	1.0	18	22,45	
58	D58	580	85	715	32.5	10	254	7-1/4	184	7	178	1.0	18	17,22,45	
58R	D58R	580	85	715	32.5	10	254	7-1/4	184	6-7/8	175	1.0	18	17,22,45	
65	D65	675	130	830	41.5	12	305	7-3/8	187	7-5/8	194	1.0	18	17,22,45	
75	D75	540	85	665	33	9-3/4	248	7	178	7-1/4	184	1.0	18	17,22,45	
86	D86	540	85	665	35.5	9	229	6-7/8	175	8-1/8	206	1.0	18	22,45	
121R	D121R	550	80	675	32.5	8-1/4	210	6-15/16	177	8-1/8	206	1.0	18	22,45	
75/86	D75DT	650	90	800	35	9-3/4	248	7	178	8-1/8	206	1.0	18	14,16,17,18,22,37,45	
34/78	D78DT	690	110	850	39	10-3/4	273	6-7/8	175	8	203	1.0	18	14,16,17,18,22,37,45	
GROUP NO.	PART NO.	PERFORMANCE LEVEL				WEIGHT (lb)	MAXIMUM OVERALL DIMENSIONS						Core Value	Warranty Free Months	FOOTNOTES
		CCA	R.C.	REF. CA	20 HR CAP		LENGTH		WIDTH		HEIGHT				
							in	mm	in	mm	in	mm			
6-VOLT HEAVY-DUTY COMMERCIAL SERVICE															
1	HP1	640	130	785	33	9	229	6-7/8	175	8-3/4	222	1.0	12	21,25	
12-VOLT HEAVY-DUTY COMMERCIAL SERVICE															

GROUP NO.	PART NO.	PERFORMANCE LEVEL			WEIGHT (lb)	MAXIMUM OVERALL DIMENSIONS						Core Value	Warranty Free Months	FOOTNOTES		
		CCA	R.C.	REF. CA		LENGTH		WIDTH		HEIGHT						
						in	mm	in	mm	in	mm					
12-VOLT HEAVY-DUTY COMMERCIAL SEVERE SERVICE/DUAL PURPOSE																
31	HP31CS	730	190	900	62	13	330	6-3/4	171	9-1/2	241	1.5	18	17,19,21,22,43,X		
	D31CS	700	185	860	57	13	330	6-3/4	171	9-1/2	241	1.5	18	17,19,21,22,43,X		
12-VOLT HEAVY-DUTY COMMERCIAL — AGM VALVE REGULATED																
31	AGM31	925	190	1050	66.5	13	330	6-3/4	171	9-1/2	241	1.5	18	2,13,17,38,39,43,X		
	AGM31CS	800	200	1000	67.5	13	330	6-3/4	171	9-1/2	241	1.5	18	2,13,17,38,39,43,X		
31P	AGM31P	925	190	1050	66.5	13	330	6-3/4	171	9-1/2	241	1.5	18	2,13,17,38,39,43		
12-VOLT LAWN MOWER — GARDEN TRACTOR — SMALL ENGINE CALCIUM MAINTENANCE-FREE																
U1	HPU1LX	350	—	430	19	7-3/4	197	5-1/8	130	7-1/4	184	0.5	6	22,Z		
	HPU1L	300	—	370	17	7-3/4	197	5-1/8	130	7-1/4	184	0.5	6	22,Z		
	DU1L	230	—	285	15.5	7-3/4	197	5-1/8	130	7-1/4	184	0.5	6	22,Z		
U1R	HPU1RX	350	—	430	19	7-3/4	197	5-1/8	130	7-1/4	184	0.5	6	22,Y		
	HPU1R	300	—	370	17	7-3/4	197	5-1/8	130	7-1/4	184	0.5	6	22,Y		
	DU1R	230	—	285	15.5	7-3/4	197	5-1/8	130	7-1/4	184	0.5	6	22,Y		
U1 = left front positive; U1R = right front positive (with terminal side of battery to front)																
22F	D22F	425	65	525	31.5	9-3/8	238	6-3/4	171	8-1/4	210	1.0	6	—		
22NF	D22NF	360	58	445	29	9-3/8	238	5-1/2	140	9	229	0.5	6	12		
GROUP NO.	PART NO.	PERFORMANCE LEVEL			WEIGHT (lb)	MAXIMUM OVERALL DIMENSIONS						Core Value	Warranty Free Months	FOOTNOTES		
		CCA	R.C.	REF. MCA		LENGTH		WIDTH		HEIGHT						
						in	mm	in	mm	in	mm					
12-VOLT MARINE / RV STARTING CALCIUM MAINTENANCE-FREE																
24	HP24M	800	130	1000	46	10-3/4	273	6-3/4	171	9-3/8	238	1.0	12	17,22,U		
	D24M	550	90	675	37	10-3/4	273	6-3/4	171	9-3/8	238	1.0	12	17,22,U		
27	HP27M	840	182	1050	57.5	12-1/2	318	6-3/4	171	9-3/8	238	1.0	12	17,U		
GROUP NO.	PART NO.	CCA	REF. MCA	MINS @ 23 A	MINS @ 25 A	REF. 20 HR CAP	WEIGHT (lb)	MAXIMUM OVERALL DIMENSIONS						Core Value	Warranty Free Months	FOOTNOTES
								LENGTH		WIDTH		HEIGHT				
								in	mm	in	mm	in	mm			
12-VOLT MARINE / RV DUAL PURPOSE STARTING / CYCLE SERVICE																
24	HP24DP	550	675	140	120	65	44	10-3/4	273	6-3/4	171	9-3/8	238	1.0	12	12,17,44,U
27	HP27DP	650	800	175	150	80	51	12-1/2	318	6-3/4	171	9-3/8	238	1.0	12	12,17,44,U
31	HP31DP	700	860	205	185	100	57	13	330	6-3/4	171	9-1/2	241	1.5	12	17,21,22,44,A
12-VOLT MARINE / RV DEEP CYCLE SERVICE																
24	HP24DC	500	615	150	130	75	45.5	10-3/4	273	6-3/4	171	9-3/8	238	1.0	12	11,17,35,44,U
27	HP27DC	575	705	200	175	90	53.5	12-1/2	318	6-3/4	171	9-3/8	238	1.0	12	11,17,35,44,U
31	HP31DC	650	800	225	190	105	60	13	330	6-3/4	171	9-1/2	241	1.5	12	11,17,21,22,35,44,A
Note: The three "DC" deep cycle part numbers above include double insulated glass mat separators.																
GROUP NO.	PART NO.	20 HR CAP	5 HR CAP	MINS @ 75 A	MINS @ 56 A	25 A	WEIGHT (lb)	MAXIMUM OVERALL DIMENSIONS						Core Value	Warranty Free Months	FOOTNOTES
								LENGTH		WIDTH		HEIGHT				
								in	mm	in	mm	in	mm			
6-VOLT FLOOR SCRUBBER AND SWEEPER																
901	HP901	250	210	—	—	73	—	11-3/4	298	7	178	11-1/2	292	1.5	6	4,11,17,19,25,34,V
	D901	235	190	—	—	67.5	—	11-3/4	298	7	178	11-1/2	292	1.5	6	4,11,17,19,25,34,V
902	HP902	330	270	—	—	97.5	—	11-3/4	298	7	178	14-3/8	365	2.0	6	4,11,17,19,25,34,V
903	HP903	370	295	—	—	111	—	11-3/4	298	7	178	16-1/2	419	2.5	6	4,11,17,19,25,34,W
12-VOLT FLOOR SCRUBBER AND SWEEPER																
921	HP921	228	180	—	—	127	—	15-1/2	394	7	178	14-1/4	362	3.0	6	11,17,25,34,V
	D921	195	160	—	—	116	—	15-1/2	394	7	178	14-1/4	362	3.0	6	11,17,25,34,V
GROUP NO.	PART NO.	20 HR CAP	5 HR CAP	MINS. DISCHARGED @ 75 A	MINS. DISCHARGED @ 56 A	25 A	WEIGHT (lb)	MAXIMUM OVERALL DIMENSIONS						Core Value	Warranty Free Months	FOOTNOTES
								LENGTH		WIDTH		HEIGHT				
								in	mm	in	mm	in	mm			
GOLF CAR — EV — MOTIVE POWER — DEEP CYCLE SERVICE																
GC2	HPGCX	235	188	132	—	488	68	10-1/4	260	7-1/8	181	10-7/8	276	1.5	12	4,11,36,U
	HPGC	230	174	120	—	448	64	10-1/4	260	7-1/8	181	10-7/8	276	1.5	12	4,11,36,U
	DGC	215	157	105	—	395	60.5	10-1/4	260	7-1/8	181	10-7/8	276	1.5	12	11,36,U
GC2H	HPGCH	255	203	145	—	530	77	10-1/4	260	7-1/8	181	11-7/8	302	1.5	12	4,11,36,U
GC8	HPGC8	165	130	85	121	318	68	10-1/4	260	7-1/8	181	11-1/8	283	1.5	12	4,11,36,U
—	HPGC12	155	122	77	110	292	86	13-1/8	333	7-1/16	179	11-3/8	289	1.5	12	11,17,N
GROUP NO.	PART NO.	CCA	REF. MCA	R.C.	MINS @ 25 A	20 HR CAP	WEIGHT (lb)	MAXIMUM OVERALL DIMENSIONS						Core Value	Warranty Free Months	FOOTNOTES
								LENGTH		WIDTH		HEIGHT				
								in	mm	in	mm	in	mm			
MARINE / RV — GOLF CAR — EV — AGM VALVE REGULATED																
U1	AGMU1	200	240	45	54	32	23	8-5/16	211	5-1/8	130	7-1/4	184	0.5	12	2,17,38,39,44,Y
22NF	AGM22NF	350	420	85	95	55	37	9	228	5-1/2	140	9-1/4	235	0.5	12	2,38,39,44,G
24M	AGM24DC	525	800	135	145	79	52	10-7/8	276	6-3/4	171	9-3/8	238	1.0	12	2,17,38,39,44,U
27M	AGM27DC	580	900	175	185	92	61.5	12-3/4	324	6-3/4	171	9-3/8	238	1.0	12	2,17,38,39,44,U
31M	AGM31DC	800	1000	200	210	105	67.5	12-15/16	329	6-3/4	171	9-3/8	238	1.5	12	2,16,17,38,39,44,A
34M	AGM34M	775	890	120	—	55	42.5	10-3/4	273	6-7/8	175	8-3/8	212	1.0	24	1,13,17,38,39,43,U
4D	AGM4D	1110	1420	380	413	198	133.5	20-3/4	527	8-1/2	216	10	254	3.0	12	2,17,44
8D	AGM8D	1450	1800	480	517	245	163	20-3/4	527	11	279	10	254	4.0	12	2,17,44
GC2	AGMGC2	680	900	380	409	190	68	10-1/4	260	7-1/8	181	10-7/8	276	1.5	12	2,44,U
GROUP NO.	PART NO.	PERFORMANCE LEVEL			WEIGHT	MAXIMUM OVERALL DIMENSIONS						Core Value	Warranty Free Months	FOOTNOTES		
		CCA	10 HR CAPACITY	lb		LENGTH		WIDTH		HEIGHT						
						in	mm	in	mm	in	mm					
POWER SPORTS AGM VALVE REGULATED																
—	ETX9	120	8	7.5	3.4	5-7/8	150	3-7/16	88	4-3/16	106	0.2	12	2,38,39,M		
—	ETX12	180	10	10	4.5	5-7/8	150	3-7/16	88	5-1/8	130	0.2	12	2,38,39,M		
—	ETX14	220	12	11.5	5.2	5-7/8	150	3-7/16	88	5-3/4	145	0.2	12	2,38,39,42,75,M		
—	ETX14L	220	12	11.5	5.2	5-7/8	150	3-7/16	88	5-3/4	145	0.2	12	2,38,39,M		
—	ETX15	220	14	11.5	5.2	5-1/4	134	3-1/2	90	6-9/16	166	0.2	12	2,38,39,42,76,M		
—	ETX15L	220	14	11.5	5.2	5-1/4	134	3-1/2	90	6-9/16	166	0.2	12	2,38,39,M		
—	ETX16	325	19	17	7.7	6-7/8	175	4	100	6-1/8	155	0.2	12	2,38,39,42,74,M		
—	ETX16L	325	19	17	7.7	6-7/8	175	4	100	6-1/8	155	0.2	12	2,38,39,42,74,M		
—	ETX18L	340	20	18	8.2	8-1/8	206	3-9/16	91	6-3/8	163	0.2	12	2,38,39,M		
—	ETX20L	310	17.5	15	6.8	6-7/8	175	3-7/16	88	6-1/8	155	0.2	12	2,38,39,M		
—	ETX30LA	400	26	21.5	9.8	6-5/8	168	5-3/16	131	7-3/4	197	0.2	12	2,38,39,78,M		

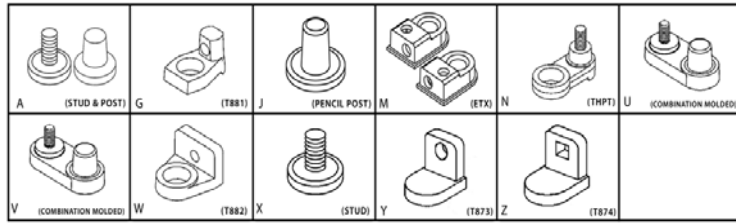

- A. Flush combination terminal w/ 5/16" stud and SAE Post, hex nuts included
- G. Offset post w/ horizontal hole, stainless steel 5/16" bolt and hex nut (T881)
- J. JIS Terminal "pencil post"
- M. Molded-in top and side connection Terminal (ETX)
- N. Vertical Stainless Steel 5/16" - 18 studs (THPT)
- U. Molded-in offset SAE post and vertical 5/16" NEG., 5/16" POS. stainless steel studs & hex nuts
- V. Molded-in offset SAE post and vertical 5/16" NEG., 5/16" POS. stainless steel studs
- W. "L" type terminal w/ 5/16" diameter hole (T882)
- X. 3/8" x 16 stainless steel stud posts
- Y. Small L terminal with round hole
- Z. Small L terminal with square hole

FOOTNOTES

1. Copper Cover / Gray Case
2. Black Cover / Gray Case
3. Copper Cover / Black Case
4. Gray Cover / Gray Case
11. Low maintenance, low antimony grids
12. Hybrid construction
13. Absorbed Glass Mat technology
14. Centerline terminal posts
16. Dual terminal universal design
17. Includes handle
18. Includes top adapter
19. Includes lifting ledges
21. Anchor lock elements
22. Flush manifold vented cover
24. CCA is EN rating
25. With individual vent caps
26. Venting elbow supplied
35. Deduct 15% from CCA and CA rating shown to allow for double insulation (glass mat)
36. Peak performance capacity
37. For height with adapter add 7/8" (22mm)
38. "Non-spillable" defined by DOT (Department of Transportation) definitions
39. "Non-spillable" defined by ICAO (International Civil Aviation Organization) and IATA (International Air Transport Association) definitions
42. Height without adapter
43. Free replacement warranty is 12 months in deep-cycle use and 3 months in full electric vehicle use.
44. Free replacement warranty is 3 months in full electric vehicle use.
45. If battery is used in on-highway vehicles equipped with two-way radios (such as taxis, police, and emergency vehicles), marine applications, off-highway use, and other non-automotive usage, free warranty replacement period will be 6 months and 3 months in full electric vehicle use.
46. If battery is used in on-highway vehicles equipped with two-way radios (such as taxis, police, and emergency vehicles), marine applications, off-highway use, and other non-automotive usage, free warranty replacement period will be 18 months. Free replacement warranty is 12 months in deep-cycle use and 3 months in full electric vehicle use.

74. Shipped with 20mm adapter
75. Shipped with two (2) 17mm adapters
76. Shipped with 10mm adapter
78. Shipped with 22mm height adapter

- Batteries are maintenance-free calcium grids, except where noted
- Batteries manufactured in polypropylene cases and covers, except where noted
- Batteries are manufactured in black cases & covers, except where noted
- SAE or DIN automotive posts used, unless noted
- Warranty is suggested months
- Weights are approximates
- CA and MCA ratings @ 32°F are approximations for comparison only
- Ratings except CCA and RC, are "nominal"